



# File path .Arg decision

Based on -full\_path argument - programm will decide which logic to use in current run.

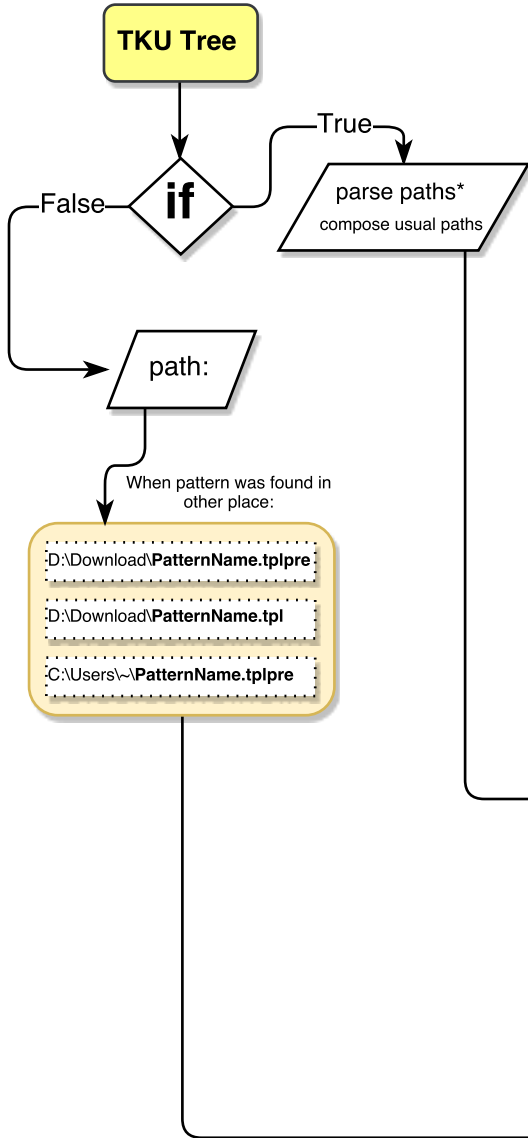


## Local Paths:

Any internal path can be composed if DEV path was included in argument -full\_path

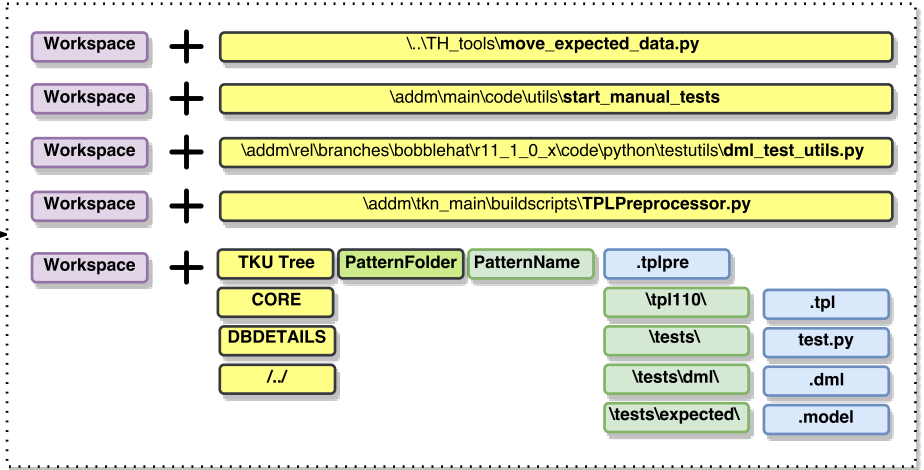


## External Paths:

Compose external path to upload/download and commands run via SSH. Start/Stop testing, scripts, update TKN etc.

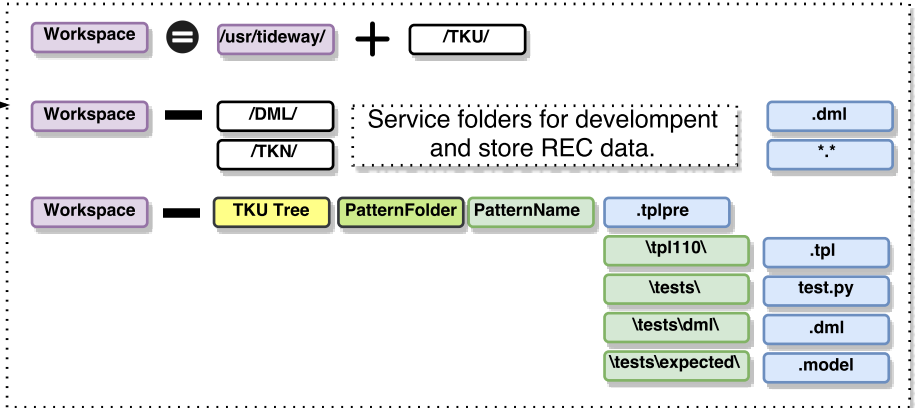

In DEV scenario: find variable or settings to point to the TKN\_CORE and then run TPLPreprocessor and Syntax Check:



If typical 'tpl110' - folder found - then check syntax and upload.



If no typical DEV folders/keys found - then just upload to ADDM via SSH, this is probably not the DEV env.

